Romuto

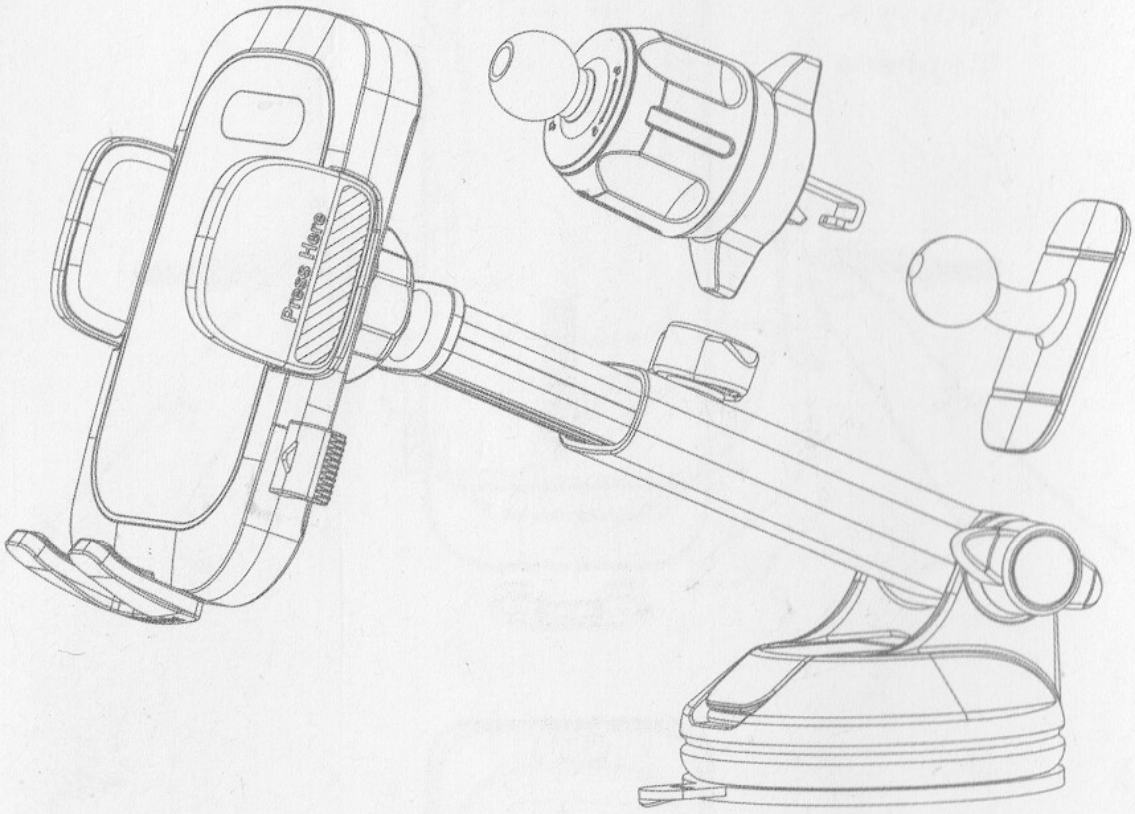

User Manual

3 in 1 Car Phone Mount

BC0612/XP14

Products not working, What to do?

This product has been improved several times, but there are some car models and phone cases that are still not compatible!

If your car and phone cases don't work with this product!

Don't worry, please contact our customer service for feedback.

Email: support@romuto.net

After-sales service window is closed, you can still contact us via email.

IMPORTANT!
If YOU NEED ASSISTANCE OR REPLACEMENT PARTS EMAIL US: support@romuto.net

Product Overview

Product name:	3 in 1 Car Phone Mount
Product brand:	Romuto
Applicable Places:	Dashboard/Windscreen/Vents
Applicable Model:	Mobile phones within 7.2 inches
Product material:	environmental protection plastic

Accessories Description



Arm Clamp



Suction cup base



Hook Clip



Adhesive base

Products not working, What to do?

This product has been improved several times, but there are some car models and phone cases that are still not compatible!

If your car and phone cases don't work with this product!

Don't worry, please contact our customer service for feedback.

Email: support@romuto.net

After-sales service window is closed, you can still contact us via email.

IMPORTANT!
If YOU NEED ASSISTANCE OR REPLACEMENT PARTS EMAIL US: support@romuto.net

Product Overview

Product name:	3 in 1 Car Phone Mount
Product brand:	Romuto
Applicable Places:	Dashboard/Windscreen/Vents
Applicable Model:	Mobile phones within 7.2 inches
Product material:	environmental protection plastic

Accessories Description



Arm Clamp



Suction cup base



Hook Clip



Adhesive base

Product Introduction

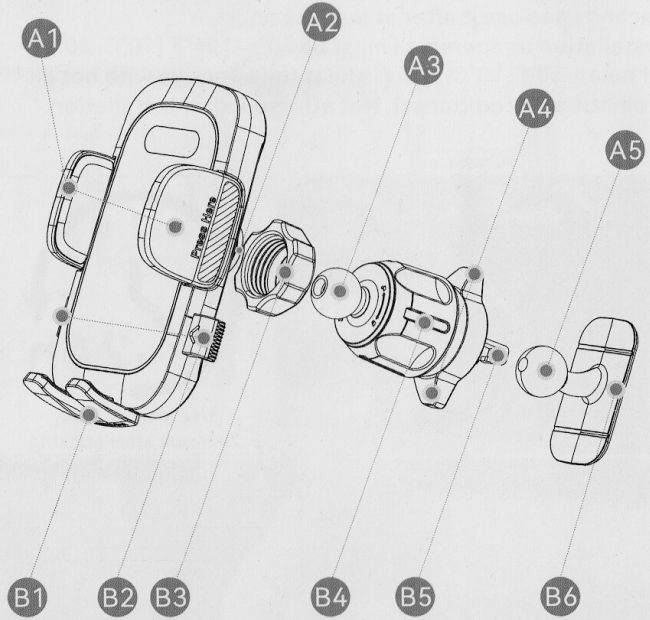

- A1 Clamp Arm
- A2 Bolt
- A3 Ball Joint
- A4 Support Plate
- A5 Ball Joint
- B1 Bottom Support
- B2 Release Button
- B3 Nut
- B4 Knob
- B5 Hook Clip
- B6 Sticky Base

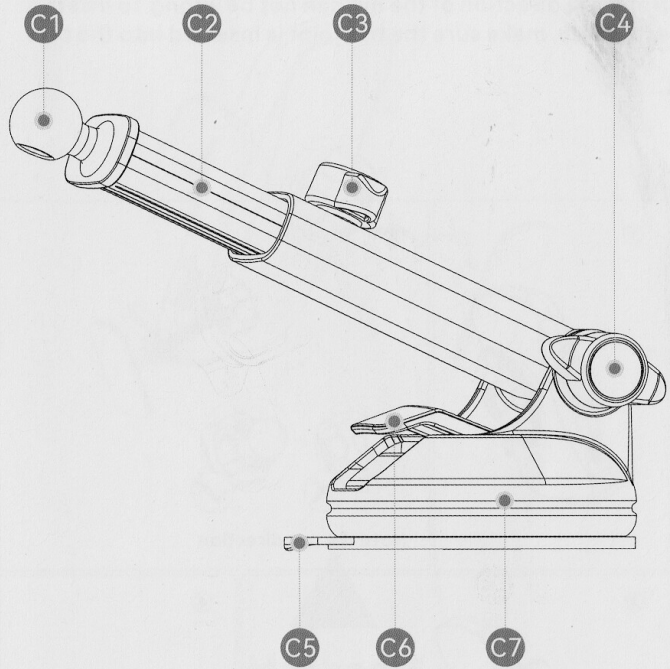

- C1 Ball Joint
- C2 Telescopic Rod
- C3 Knob
- C4 Knob
- C5 Suction Cup Ear
- C6 Suction Cup Lock
- C7 Suction Cup

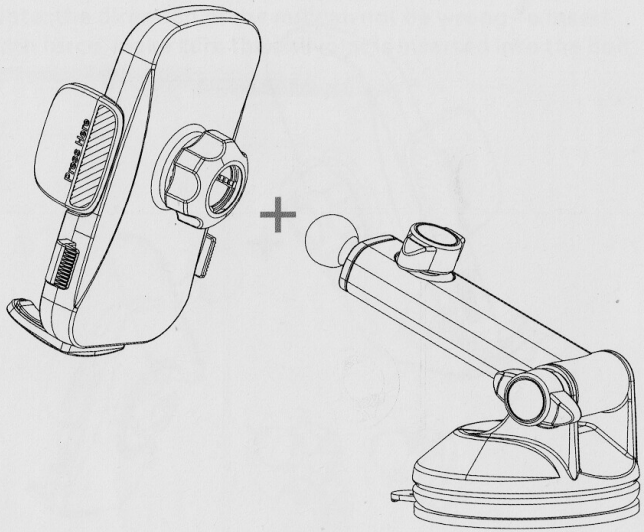

Method 1

Use With the Suction Cups

Installation steps

Contact us in time if you have any questions.

Method 1: STEP 01

Please follow the steps to assemble the product.
Note: the direction of the nut can not be wrong To insert with force, make sure the ball joint is inserted into the bolt.

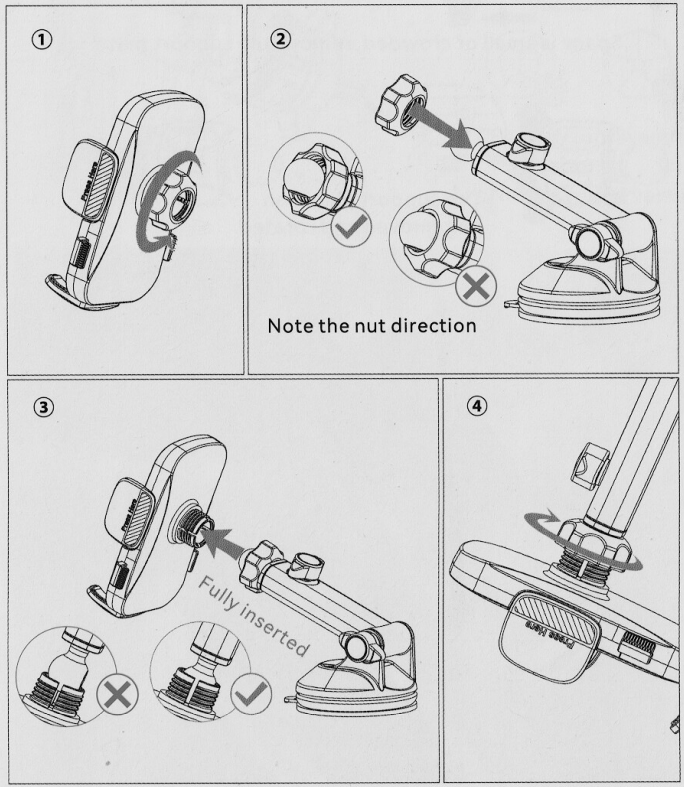

Method 1: STEP 02

It cannot be installed on soft and comfortable materials (some high-end car dashboards). It is recommended to install it on the windshield or use the vent hook clip. The hard dashboards only support flat and smooth surfaces.

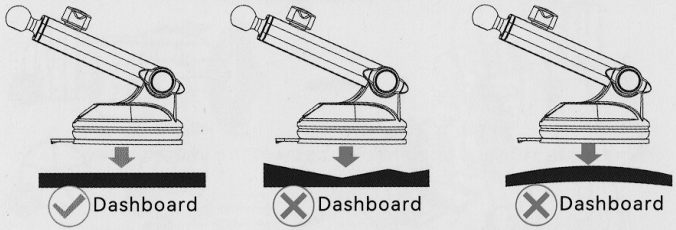

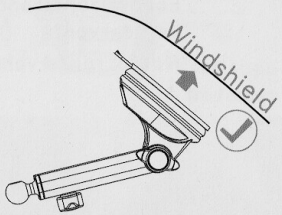

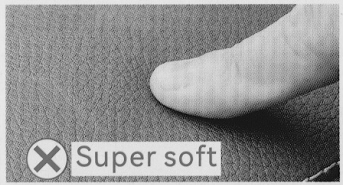

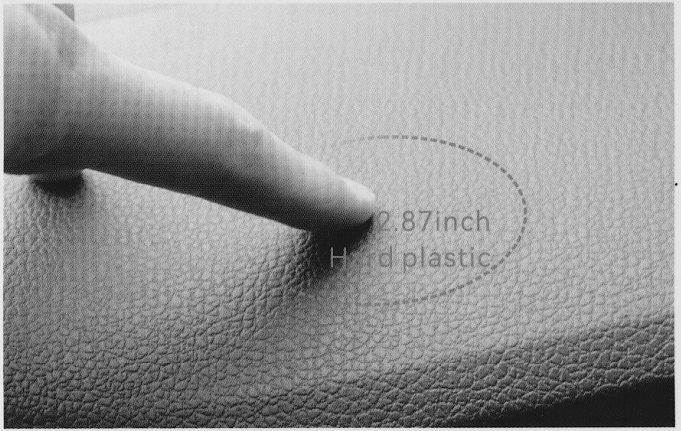

Method 1: STEP 03

Clean the selected 2.87-inch space. Ensure that the surface is clean and free of dust, oil, wax, and water. Wait 10 seconds to dry thoroughly. Without this step, the car mount may fall off.

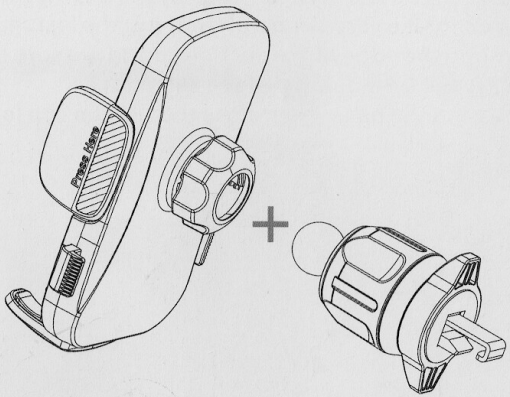

Method 2

Use With the Vent Hook Clip

Installation steps

Contact us in time if you have any questions.

Method 2: STEP 01

Please follow the steps to assemble the product.
Note: the direction of the nut can not be wrong To insert with force, make sure the ball joint is inserted into the bolt.

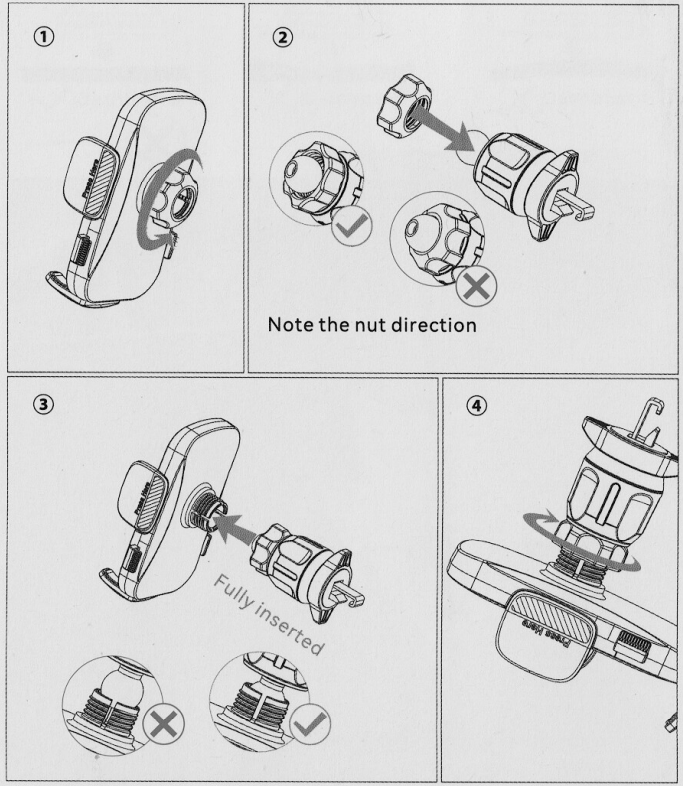

Method 2: STEP 02

Adjust the hook clip to the maximum length. Insert vent.
For horizontal and vertical vents. Not for round vents.

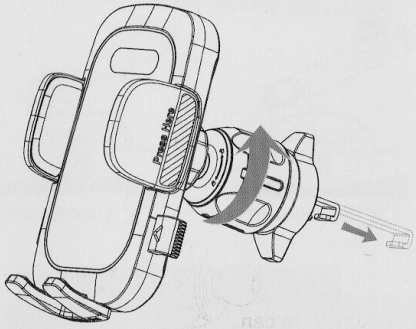



For horizontal and vertical vents
Not for round vents

Method 2: STEP 02

If the space of the vent is small or crowded, you can consider removing the support plate, which can also be used.
Turn the hook clamp adjustment knob to lock the vent.
Note: too much force will damage the vent!

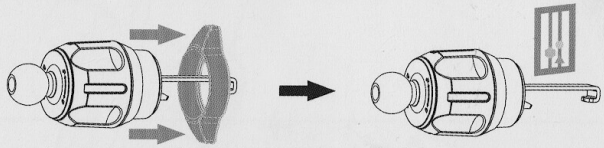

Space is small or crowded, remove the support plate

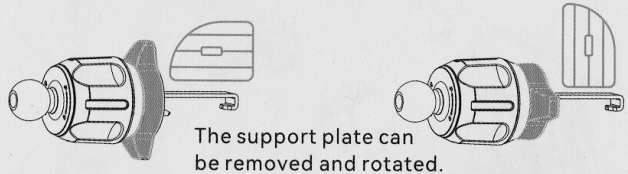

The support plate can be removed and rotated.

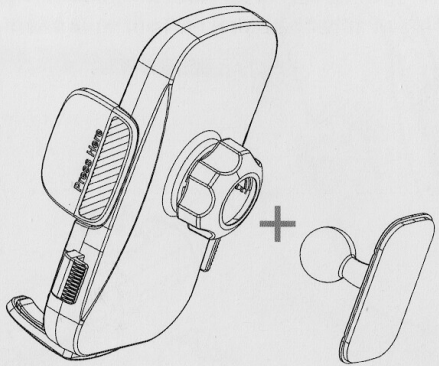

Method 3

Use With the Sticky Base

Installation steps

Contact us in time if you have any questions.

Method 3: STEP 01

Please follow the steps to assemble the product.
Note: the direction of the nut can not be wrong To insert with force, make sure the ball joint is inserted into the bolt.

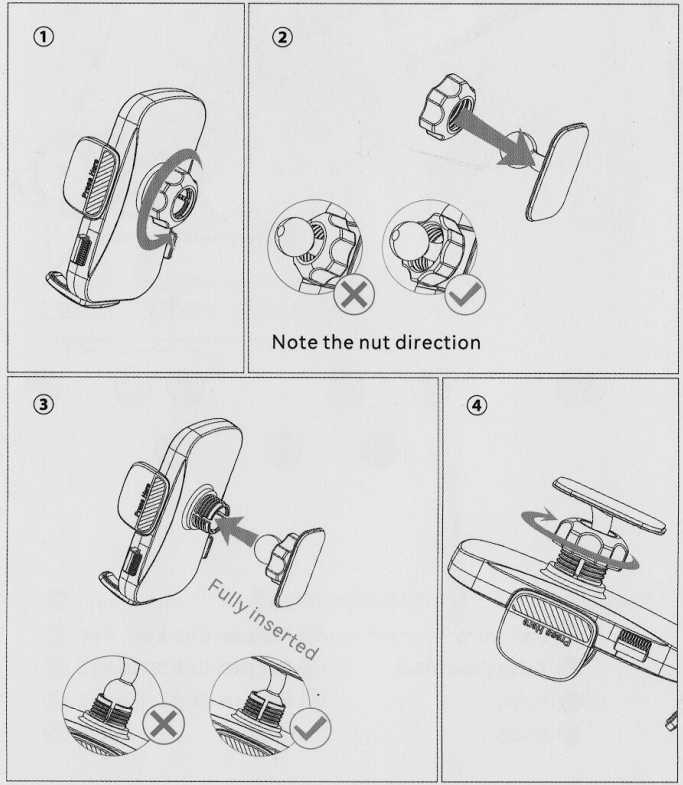

Method 3: STEP 02

Pull off the protective film at the bottom. Press firmly for 20 seconds and use it after at least 24 hours.
Installation temperature must be 50°F-104°F (10°C-40°C). (If below 50°F(10°C), please heat the adhesive with hot air from the air conditioner). Not affected after installation.

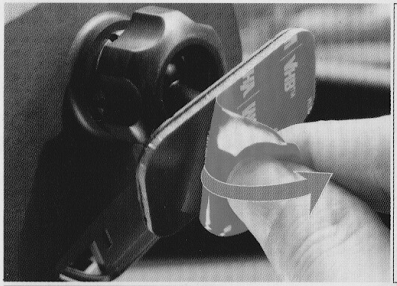

Use after at least
24 hours after sticking

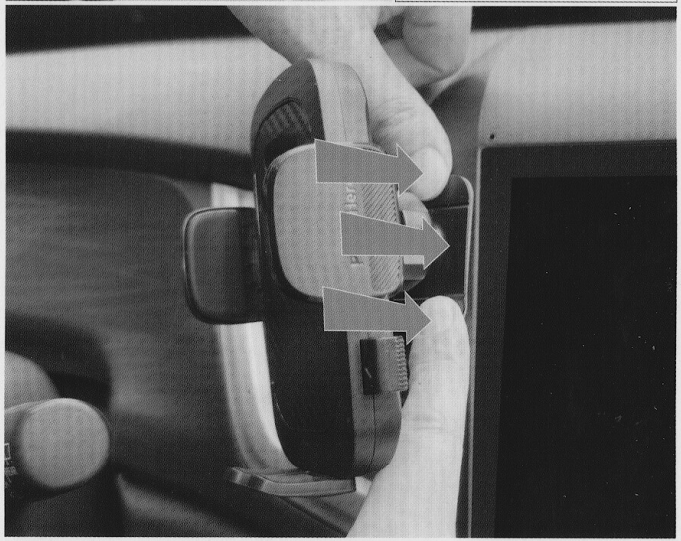

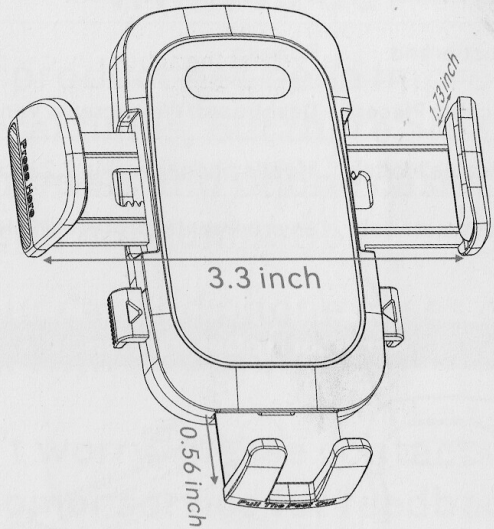

Clamp arm use method

Contact us in time if you have any questions.

STEP 01

Press the release buttons on both sides to open the clamp arm. Adjust the bottom support to the size of your phone.

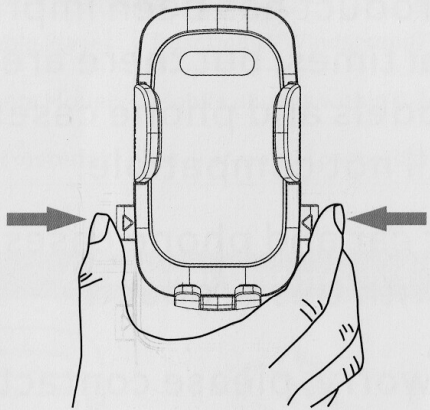

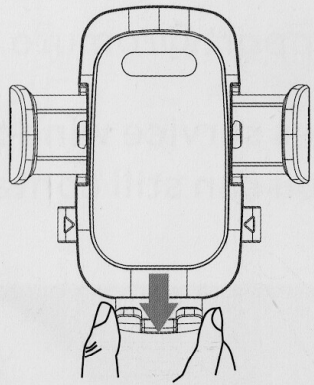

STEP 02

Put the phone in, and press the sides of the clamp arms to clamp tightly to ensure the mobile phone is fixed securely. To remove the phone, press the release button to open the clamp arm.

Putting in the phone

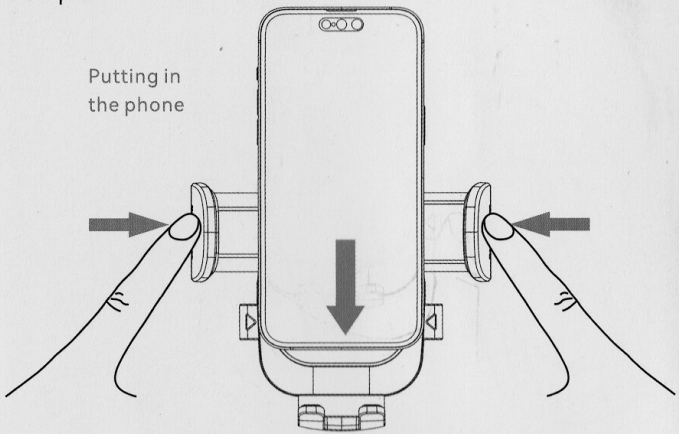

Take out the phone

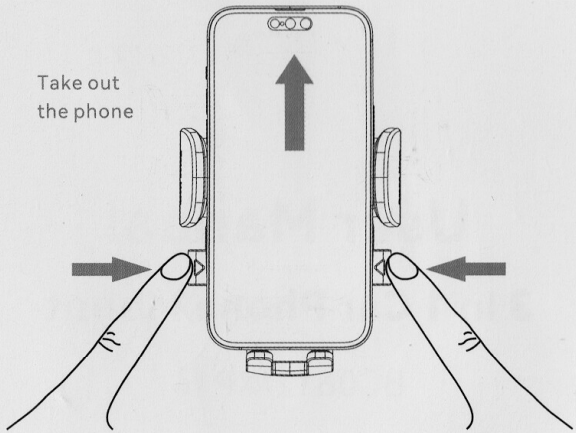

Romuto

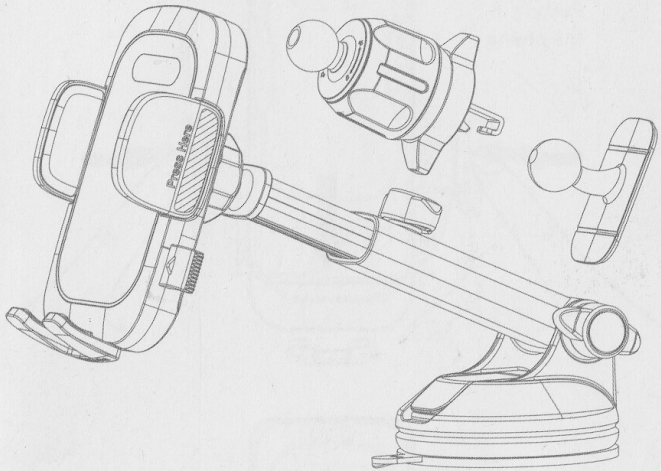

User Manual

3 in 1 Car Phone Mount

BC0612/XP14

Method 1: STEP 0

Peel off the protective film from the suction cup base. (*If the suction cups don't work or are dirty. You can clean it with water. Wait for it to dry before attempting the installation.)
Press around the edge of the suction cup, Make sure the silicone fits the Dashboard surface completely.
Keep pressing the base. Then close the suction cup lock.